

iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**



Ezybond® BSI951:2009


Nylon Earth Bond Clamp

Manufactured by HCL, the Ezybond® Earth clamp conforms to BS951-2009. It is quick and easy to assemble, with an innovative design, including a double grip jaw, conductor guide vanes and security locking tabs. Manufactured in Nylon 6.6, it also has excellent mechanical, chemical, heat resistant and self extinguishing properties. The Ezybond® is the perfect Earth Bond Clamping solution.



Part Number HCL	Pipe Diameter (A)		Conductor Size (B)	Band Width (C)		Band Thickness (D)		Colour
	mm	inch		mm	inch	mm	inch	
EZB-15AC	15.0	0.59	A - B (2.5 - 6.0mm ²)	11.9	0.47	3.2	0.13	Black
EZB-22AC	22.0	0.87		12.9	0.51	3.3	0.13	
EZB-15D	15.0	0.59	D (10.0mm ²)	11.9	0.47	3.0	0.12	Grey
EZB-22D	22.0	0.87		12.9	0.51	3.4	0.13	

All weights, dimensions & quantities are subject to a 2.5% tolerance. 10 safety labels included in each bag.

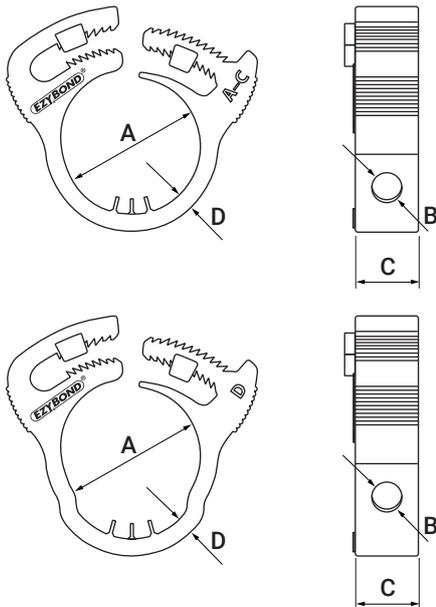

PRODUCT INFORMATION


Manufactured by:	HCL
RoHS Compliant:	Yes
Hazardous Goods:	No
HS Tariff Code:	7326 90 92

MATERIAL INFORMATION

Clamp:	Heat/UV Stabilised ROHS compliant Nylon 6.6.
--------	--

Significant advantages include

- More than halves installation time
- Continuous uniform metal contact
- No screws or loose parts
- ASTA approved electrical tests to BSI951:2009
- Safe to fit - No sharp edges
- Increased security
- Cross-bonding becomes a simple operation with continuous uniform contact
- Always correct size for pipe fitted
- Manufactured according to ISO 9001-2015
- Corrosion resistant - can be used in damp environments

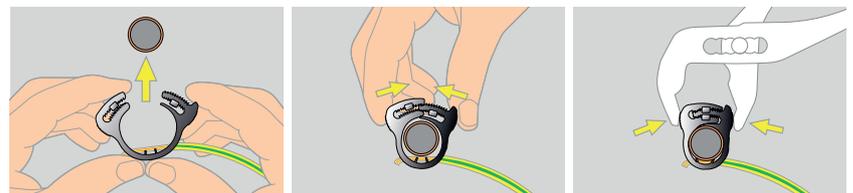

Ezybond® versus standard Earth Clamps

Ezybond® offers a much faster installation time when compared to standard Earth clamps. The resulting cost reduction is highly advantageous to all users, ranging from Electricians to OEMs.





info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands