

iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**


PRTE - Rapid pull ring EPDM

Galvanized steel - Pull ring edge

Rapid pull ring PRTE are electro galvanised and are used for quick and tight installation of duct systems. Equipped with a rubber gasket in EPDM which provides a tight connection and stability in the duct system, which ensures electrical conductivity through the unit. Standard temp. -30°C to + 80°C. With silicone seal for max 200°C - request quotation. Ø80 - Ø400 is equipped with a quick buckle/handle, the powerful steel spring provides a high quality opening/closing mechanism. Ø425 - Ø600 comes with bolt and nut.



PRTE - Rapid pull ring EPDM

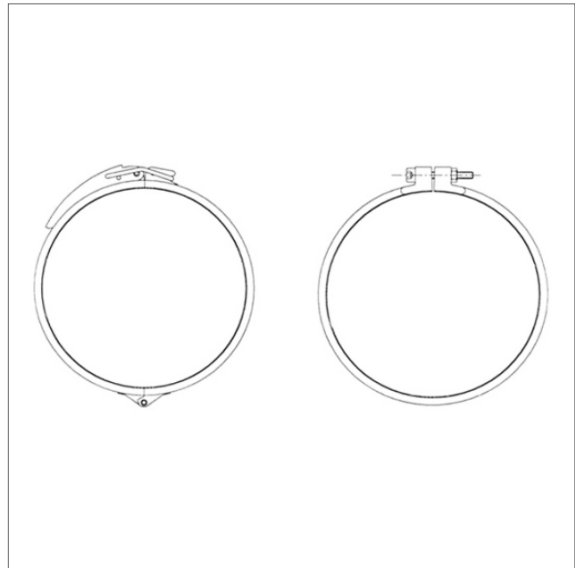

Rapid lock pull ring - with hinge and handle up to Ø400 mm. With bolt Ø450 mm and bigger.

Art.no	Ø (mm)	Weight (kg)
PRTE-080	80	0.2
PRTE-100	100	0.2
PRTE-120	120	0.25
PRTE-125	125	0.25
PRTE-140	140	0.3
PRTE-150	150	0.3
PRTE-160	160	0.3
PRTE-180	180	0.35
PRTE-200	200	0.4
PRTE-225	225	0.45
PRTE-250	250	0.45
PRTE-300	300	0.45
PRTE-315	315	0.45
PRTE-350	350	0.48
PRTE-400	400	0.53



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands