

iQparts
IQ-PARTS-SHOP.COM




**SPECS &
INFORMATION**

STAINLESS STEEL BANDCLAMP HI-TORQUE SPRING

SPECIFICATIONS

MATERIAL 	FINISH 	DIAMETER RANGE 	WEIGHT 	PADLOCKABLE 	SAFETY 	AMOUNT OF DIAMETER ADJUSTMENT 	STRENGTH/ UTS** 
STAINLESS STEEL 304	NATURAL	90-500MM		No	No	45MM	40 KG

****STRENGTH /UTS** - The figures for the ultimate tensile strength (UTS) have been determined by tensile tests in a normal working load direction on standard products and do not include any safety factors. A maximum load rate of 30mm per minute was applied throughout the tests. The UTS figures are shown in Kilograms and for a safe working load we suggest that approximately half of the ultimate strength figure is used.

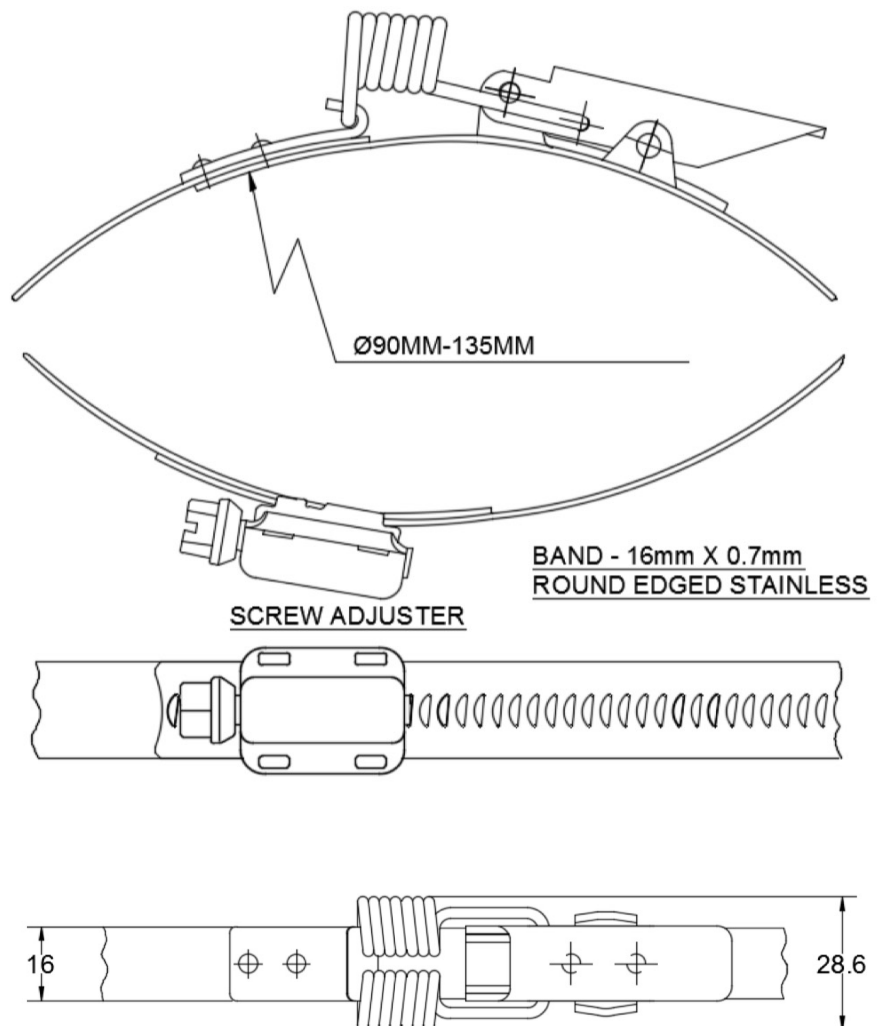



iq
parts
IQ-PARTS-SHOP.COM

info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands