


iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

SUPERCLAMPS

316 Stainless Steel (HNSS):-

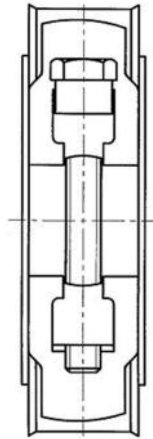

Part No.	Adjustment mm	Band Width mm	Band Thickness mm	Recommended Torque Nm	Maximum Torque Nm	Screw Head mm	Part No.
JSC019SS316	17-19	18.0	0.6	4.5	6.0	8	JSC019SS316
JSC022SS316	20-22	18.0	0.6	4.5	6.0	8	JSC022SS316
JSC025SS316	23-25	18.0	0.6	4.5	6.0	8	JSC025SS316
JSC028SS316	26-28	18.0	0.6	4.5	6.0	8	JSC028SS316
JSC031SS316	29-31	18.0	0.6	4.5	6.0	8	JSC031SS316
JSC035SS316	32-35	20.0	1.0	6.0	8.0	10	JSC035SS316
JSC039SS316	36-39	20.0	1.0	6.0	8.0	10	JSC039SS316
JSC043SS316	40-43	20.0	1.0	6.0	8.0	10	JSC043SS316
JSC047SS316	44-47	20.0	1.0	6.0	8.0	10	JSC047SS316
JSC051SS316	48-51	20.0	1.0	6.0	8.0	10	JSC051SS316
JSC055SS316	52-55	20.0	1.0	6.0	8.0	10	JSC055SS316
JSC059SS316	56-59	20.0	1.0	6.0	8.0	10	JSC059SS316
JSC063SS316	60-63	20.0	1.0	6.0	8.0	10	JSC063SS316
JSC067SS316	64-67	25.0	1.2	18.5	25.0	13	JSC067SS316
JSC073SS316	68-73	25.0	1.2	18.5	25.0	13	JSC073SS316
JSC079SS316	74-79	25.0	1.2	18.5	25.0	13	JSC079SS316
JSC085SS316	80-85	25.0	1.2	18.5	25.0	13	JSC085SS316
JSC091SS316	86-91	25.0	1.2	18.5	25.0	13	JSC091SS316
JSC097SS316	92-97	25.0	1.2	18.5	25.0	13	JSC097SS316
JSC103SS316	98-103	25.0	1.2	18.5	25.0	13	JSC103SS316
JSC112SS316	104-112	25.0	1.2	18.5	25.0	13	JSC112SS316
JSC121SS316	113-121	25.0	1.2	18.5	25.0	13	JSC121SS316
JSC130SS316	122-130	25.0	1.2	18.5	25.0	13	JSC130SS316
JSC139SS316	131-139	25.0	1.2	18.5	25.0	13	JSC139SS316
JSC148SS316	140-148	25.0	1.2	18.5	25.0	13	JSC148SS316
JSC161SS316	149-161	25.0	1.5	18.5	25.0	13	JSC161SS316
JSC174SS316	162-174	25.0	1.5	18.5	25.0	13	JSC174SS316
JSC187SS316	175-187	25.0	1.5	18.5	25.0	13	JSC187SS316
JSC200SS316	188-200	25.0	1.5	18.5	25.0	13	JSC200SS316
JSC213SS316	201-213	25.0	1.5	18.5	25.0	13	JSC213SS316
JSC226SS316	214-226	25.0	1.5	18.5	25.0	13	JSC226SS316
JSC239SS316	227-239	25.0	1.5	18.5	25.0	13	JSC239SS316
JSC255SS316	240-255	25.0	1.5	18.5	25.0	13	JSC255SS316
JSC265SS316	253-265	25.0	1.5	18.5	25.0	13	JSC265SS316

Quality Assurance:- DIN
3017

Corrosion Resistance: 2000 hours NSS Test

Fastening: A/F screw – see table

Industry Recommendations:-



SAE J1508 Surface Vehicle Standards-Hose Clamp Specifications, Type TB is referenced in the quality control methods for the design/manufacture of the Jubilee Superclamps Range.

316 Stainless Steel

The finest hose clip
in the world



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands