

iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**



ASFA S (12 mm) Hose Clamp with Stainless Steel inner-ring (plain finish)


ASFA S hose clamps fitted with stainless steel inner-rings were designed to give extra protection to the hose especially where vibration over long periods of time is an issue.


These clamps are particularly recommended for use on silicone hoses, which can easily be cut. The inner-ring fitted to the ASFA clamp prevents damage to the hose as well as distributing the pressure of the clamp evenly around the hose.

** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.*

Application Ø	S W1	S W2	S W3	S W4	S W5	Maximum values		Box Quantity (MOQ)
						Torque (Nm)	Pressure (Bars)	
16-27	A300900-1	A301701-7	A301620-9	A301473-0	A301772-0	4,5	40	50
20-32	A300900-2	A301702-5	A301621-7	A301451-0	A301750-0	5,5	40	50
25-40	A300900-3	A301703-3	A301622-5	A301452-9	A301751-9	5,5	40	50
30-45	A300900-4	A301700-9	A301623-3	A301474-8	A301773-8	5,5	35	50
32-50	A300900-5	A301704-1	A301624-1	A301453-7	A301752-7	6,5	35	50
40-60	A300900-6	A301705-0	A301625-0	A301454-5	A301753-5	6,5	30	50
50-70	A300900-7	A301706-8	A301626-8	A301455-3	A301754-3	7	25	50
60-80	A300900-8	A301707-6	A301627-6	A301456-1	A301755-1	7	20	50
70-90	A300900-9	A301708-4	A301628-4	A301457-0	A301756-0	7	17	50
80-100	A300901-0	A301709-2	A301629-2	A301458-8	A301757-8	7	14	25
90-110	A300901-1	A301710-5	A301630-5	A301459-6	A301758-6	7	12	25
100-120	A300901-2	A301711-3	A301631-3	A301460-9	A301759-4	7	10	25
110-130	A300901-3	A301712-1	A301632-1	A301461-7	A301760-7	7	8	25
120-140	A300901-4	A301713-0	A301633-0	A301462-5	A301761-5	7	7	25
130-150	A300901-5	A301714-8	A301634-8	A301463-3	A301762-3	7	6	25
140-160	A300901-6	A301715-6	A301635-6	A301464-1	A301763-1	7	5	25
150-170	A300901-7	A301716-4	A301636-4	A301465-0	A301764-0	7	4	25
160-180	A300901-8	A301717-2	A301637-2	A301466-8	A301765-8	7	3	25
170-190	A300901-9	A301718-0	A301638-0	A301467-6	A301766-6	7	2	10
180-200	A300902-0	A301719-9	A301639-9	A301468-4	A301767-4	7	2	10
190-210	A300902-1	A301720-1	A301642-8	A301469-2	A301768-2	7	1,8	10
200-220	A300902-2	A301721-0	A301643-6	A301470-5	A301769-0	7	1,8	10
210-230	A300902-3	A301722-8	A301644-4	A301471-3	A301770-3	7	1,6	10
220-240	A300902-4	A301723-6	A301645-2	A301472-1	A301771-1	7	1,6	10

** It is recommended to apply 75% of the maximum values contained in the table.*

TECHNICAL INFORMATION	
	MATERIAL CLAMP BAND, HOUSING AND SCREW: STAINLESS STEEL SPRING INSERT: STAINLESS STEEL
	MATERIAL INNER-RING STAINLESS STEEL DIN (1.4310) AISI 301
	CORROSION RESIST. According to material from 72 to 600 HOURS SALT SPRAY
	MAXIMUM TIGHTENING SPEED (RPM) 540 ±5

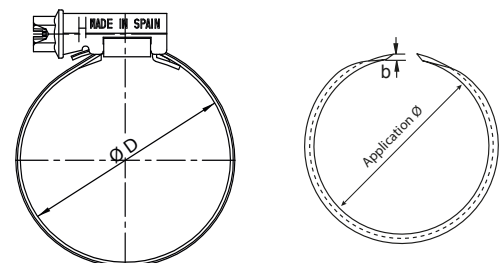



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands