

iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

Schraubenlose Schellen




W4


Schraubenlose Schellen sind aus rostfreiem Bandstahl und in einem Stück gefertigt.




Die Konstruktion des Klemmverschlusses ermöglicht eine sehr genaue und sichere Einstellung, die zusammen mit der Konstruktion des Ringes eine ähnliche Funktion wie die elastische Reserve hat, die es ermöglicht, das konstante Anzugsmoment bei möglichen Druck- oder Temperaturänderungen aufrechtzuerhalten.

Die perfekt abgerundeten Kanten der Schelle verhindern Beschädigungen des Schlauchs während der Anbringung. Die Korrosionsbeständigkeit ist maximiert, da sie komplett aus AISI-304 Edelstahl besteht.

Bezeichnung	Art. Nr.	Anwendung \varnothing		Breit d	Farbe	VPE	Verpackung
		min.	max.				
CLIP 8	0303041-0	8,5	9,5	7	GELB	500	8.000
CLIP 9	0303042-9	9,5	10,5	7	VIOLETT	500	8.000
CLIP 10	0303043-7	10,5	11,5	7	NATUR	500	4.000
CLIP 11	0303044-5	11,5	12,5	7	GRÜN	500	4.000
CLIP 12	0303045-3	12,5	14,0	8	SCHWARZ	500	4.000
CLIP 13	0303046-1	13,5	15,0	8	GELB	500	2.000
CLIP 14	0303047-0	14,5	16,0	8	VIOLETT	250	2.000
CLIP 15	0303048-8	15,5	17,0	8	NATUR	250	2.000
CLIP 16	0303049-6	16,5	18,0	8	GRÜN	250	2.000
CLIP 17	0303050-9	17,5	19,0	8	SCHWARZ	250	2.000
CLIP 18	0303051-7	18,5	20,0	8	GELB	250	2.000
CLIP 19	0303052-5	19,5	21,0	8	VIOLETT	250	2.000
CLIP 20	0303053-3	20,5	22,0	8	NATUR	250	2.000
CLIP 21	0303054-1	21,5	23,0	8	GRÜN	250	2.000
CLIP 22	0303055-0	22,5	24,0	8	SCHWARZ	250	2.000
CLIP 23	0303056-8	23,5	25,0	8	GELB	250	2.000
CLIP 24	0303057-6	24,5	26,0	8	VIOLETT	250	2.000

TECHNISCHE INFO.	
	ROHSTOFF EDELSTAHL (X5CrNi18/10) AISI-304
OBERFLÄCHENBEHANDLUNG	EDELSTAHL
KORROSIONSFESTIGKEIT	SALZPRÜHTEST (ASTM B-117): 400 STUNDEN



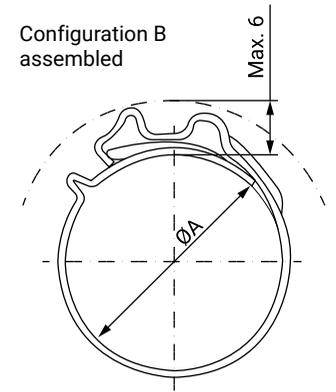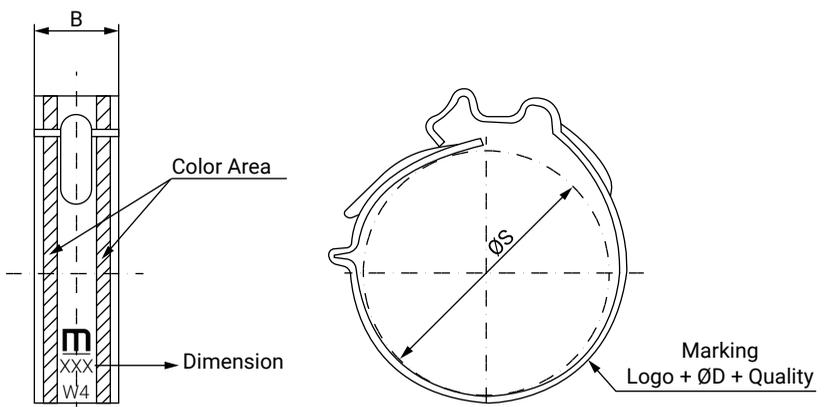

MIKALOR REFERENCE	ØD	ØA APPLICATION	ØS MIN. SUPPLY	B ±0.1	CONFIG.	COLOR	PRODUCTION REFERENCE
03030410	8	8,5-9,5	9,5	7	A	YELLOW	340001
03030429	9	9,5-10,5	10,5	7	A	VIOLET	340002
03030437	10	10,5-11,5	11,5	7	A	NEUTRAL	340003
03030445	11	11,5-12,5	12,5	7	A	GREEN	340004
03030453	12	12,5-14,0	14	8	B	BLACK	340005
03030461	13	13,5-15,0	15	8	B	YELLOW	340006
03030470	14	14,5-16,0	16	8	B	VIOLET	340007
03030488	15	15,5-17,0	17	8	B	NEUTRAL	340008
03030496	16	16,5-18,0	18	8	B	GREEN	340009
03030509	17	17,5-19,0	19	8	B	BLACK	340010
03030517	18	18,5-20,0	20	8	B	YELLOW	340011
03030525	19	19,5-21,0	21	8	B	VIOLET	340012
03030533	20	20,5-22,0	22	8	B	NEUTRAL	340013
03030541	21	21,5-23,0	23	8	B	GREEN	340014
03030550	22	22,5-24,0	24	8	B	BLACK	340015
03030568	23	23,5-25,0	25	8	B	YELLOW	340016
03030576	24	24,5-26,0	26	8	B	VIOLET	340017

TECHNICAL INFORMATION	
1	MATERIAL: STAINLESS STEEL X5Cr Ni 18/10 (Din 1.4301) (AISI-304)
2	ANTICORROSION SPECIFICATION: SALT SPRAY TEST, 400 H ACCORDING TO ASTM B-117 STANDARD MAXIMUM PROPORTION OF 10 % OF BASE METAL CORROSION ALLOWED

M02	14/05/2015 SUPPRESSED REINFORCING STAMPS	M03	13/01/2020 UPDATED DRAWING
M01	Initial Level	13/11/2014 NEW FORMAT	
LEVEL	DESCRIPTION		
SHEET. A-3	CUSTOMER	FAMILY. 03030AAA	
		NAME. CLIP W4 CLAMP	
SCALE.	ENG. LEVEL	SUBST. BY	
	M03 13/01/2020 PROPOSAL DRAWING	INTERNAL PART Nº 3400AA	
GENERAL TOL. ±0.3		NOTES.	
		DRAW. JAG SIGNATURE	
		APPROVED. JMG	
		DATED. 13/01/2020	

MIKALOR



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands