

iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

Clip Clamp

The Clip Clamp is manufactured entirely from one strip of stainless steel.

The design of the locking mechanism of the Clip Clamp allows for great precision and safety in assembly. This mechanism, together with the folds in the material confers a spring function to this clamp, meaning that it can maintain constant pressure around the hose despite possible changes in temperature or pressure.


The perfectly rounded band edges avoid damage to the hose during application. The corrosion resistance is excellent due to the AISI 304 material employed in its manufacture.




W4



Article	Part nº	Application Ø		Width d	Colour	Box Quantity (MOQ)	Outer Packing
		min.	max.				
CLIP 8	0303041-0	8,5	9,5	7	YELLOW	500	8.000
CLIP 9	0303042-9	9,5	10,5	7	PURPLE	500	8.000
CLIP 10	0303043-7	10,5	11,5	7	NEUTRAL	500	4.000
CLIP 11	0303044-5	11,5	12,5	7	GREEN	500	4.000
CLIP 12	0303045-3	12,5	14,0	8	BLACK	500	4.000
CLIP 13	0303046-1	13,5	15,0	8	YELLOW	500	2.000
CLIP 14	0303047-0	14,5	16,0	8	PURPLE	250	2.000
CLIP 15	0303048-8	15,5	17,0	8	NEUTRAL	250	2.000
CLIP 16	0303049-6	16,5	18,0	8	GREEN	250	2.000
CLIP 17	0303050-9	17,5	19,0	8	BLACK	250	2.000
CLIP 18	0303051-7	18,5	20,0	8	YELLOW	250	2.000
CLIP 19	0303052-5	19,5	21,0	8	PURPLE	250	2.000
CLIP 20	0303053-3	20,5	22,0	8	NEUTRAL	250	2.000
CLIP 21	0303054-1	21,5	23,0	8	GREEN	250	2.000
CLIP 22	0303055-0	22,5	24,0	8	BLACK	250	2.000
CLIP 23	0303056-8	23,5	25,0	8	YELLOW	250	2.000
CLIP 24	0303057-6	24,5	26,0	8	PURPLE	250	2.000

TECHNICAL INFORMATION	
MATERIAL	STAINLESS STEEL (X5CrNi18/10) AISI-304
FINISH	STAINLESS STEEL
CORROSION RESISTANCE	400 HOURS SALT SPRAY (ASTM B-117)



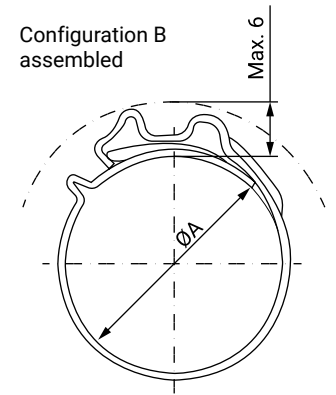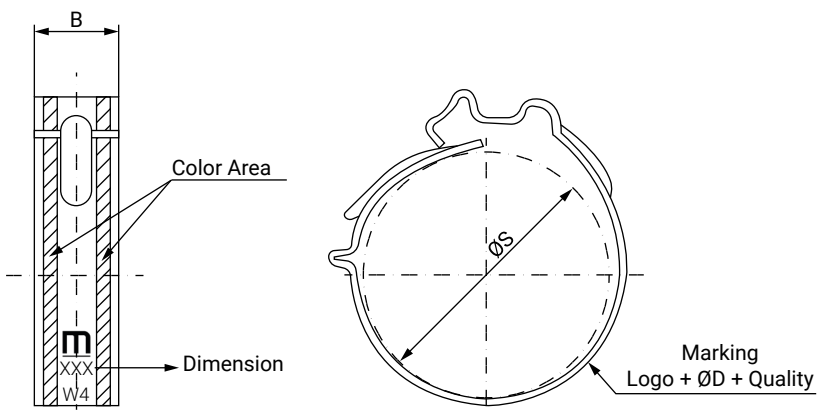

MIKALOR REFERENCE	ØD	ØA APPLICATION	ØS MIN. SUPPLY	B ±0.1	CONFIG.	COLOR	PRODUCTION REFERENCE
03030410	8	8,5-9,5	9,5	7	A	YELLOW	340001
03030429	9	9,5-10,5	10,5	7	A	VIOLET	340002
03030437	10	10,5-11,5	11,5	7	A	NEUTRAL	340003
03030445	11	11,5-12,5	12,5	7	A	GREEN	340004
03030453	12	12,5-14,0	14	8	B	BLACK	340005
03030461	13	13,5-15,0	15	8	B	YELLOW	340006
03030470	14	14,5-16,0	16	8	B	VIOLET	340007
03030488	15	15,5-17,0	17	8	B	NEUTRAL	340008
03030496	16	16,5-18,0	18	8	B	GREEN	340009
03030509	17	17,5-19,0	19	8	B	BLACK	340010
03030517	18	18,5-20,0	20	8	B	YELLOW	340011
03030525	19	19,5-21,0	21	8	B	VIOLET	340012
03030533	20	20,5-22,0	22	8	B	NEUTRAL	340013
03030541	21	21,5-23,0	23	8	B	GREEN	340014
03030550	22	22,5-24,0	24	8	B	BLACK	340015
03030568	23	23,5-25,0	25	8	B	YELLOW	340016
03030576	24	24,5-26,0	26	8	B	VIOLET	340017

TECHNICAL INFORMATION	
1	MATERIAL: STAINLESS STEEL X5Cr Ni 18/10 (Din 1.4301) (AISI-304)
2	ANTICORROSION SPECIFICATION: SALT SPRAY TEST, 400 H ACCORDING TO ASTM B-117 STANDARD MAXIMUM PROPORTION OF 10 % OF BASE METAL CORROSION ALLOWED

M02	14/05/2015 SUPPRESSED REINFORCING STAMPS	M03	13/01/2020 UPDATED DRAWING
M01	Initial Level	13/11/2014 NEW FORMAT	
LEVEL	DESCRIPTION		
SHEET. A-3	CUSTOMER	FAMILY. 03030AAA	
		NAME. CLIP W4 CLAMP	
SCALE.	ENG. LEVEL	SUBST. BY	
	M03 13/01/2020 PROPOSAL DRAWING	NOTES.	
GENERAL TOL. ±0.3	DRAW.	JAG	SIGNATURE
	APPROVED.	JMG	
	DATED.	13/01/2020	



MIKALOR



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands