





5/16" Wide Worm Drive Clamp- SAE Type "M" Mini Series

- Lightweight, low profile, compact design allows ease of installation in restricted spaces
- 5/16" band width provides significant sealing pressure with low installation torque levels
 - o MM Series 200/100 Series Stainless Steel Mini Worm Drive Clamp Band is 200 series stainless steel and housing and screw are 100 series stainless steel
 - Ultimate Torque: 20in.lbs.min. (2.3Nm) • Installation Torque: 12-15in.lbs. (1.4-1.7Nm)
 - o MMSS Series 200/400 Series Stainless Steel Mini Worm Drive Clamps Band and housing are 200/300 series stainless steel and screw is 400 series stainless steel
 - Ultimate Torque: 15in.lbs.min. (1.7Nm) • Installation Torque: 10-12in.lbs. (1.1- 1.4Nm)
 - o MMFSS Series all 300 series stainless steel band, housing and screw





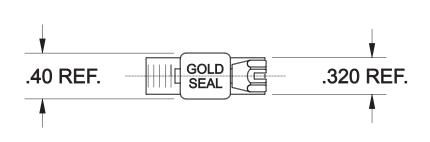

| Size Ref. | | Part Number | "A" Diameter Range | | | | | | | |
|-----------|---------------------------|---------------------------|---------------------------|----------|------|--------|--------|--------|-------------|--|
| No. | "100" Series Stainless | "400" Series Stainless | "300" Series Stainless | Decimals | | Inches | | Millim | Millimeters | |
| | Screws | Screws | Screws | Min. | Max. | Min. | Max. | Min. | Max. | |
| 3 | MM 3 | MM 3 SS | MMF 3 SS | 0.25 | 0.50 | 1/4 | 1/2 | 6 | 13 | |
| 4 | MM 4 | MM 4 SS | MMF 4 SS | 0.25 | 0.63 | 1/4 | 5/8 | 6 | 16 | |
| 6/8 | MM 5 | MM 5 SS | MMF 5 SS | 0.31 | 0.91 | 5/16 | 29/32 | 8 | 23 | |
| 10 | MM 10 | MM 10 SS | MMF 10 SS | 0.56 | 1.06 | 9/16 | 1-1/16 | 14 | 27 | |

Available in packed and bulk stock. Other packaging configurations available. Clamps meet or exceed SAE J1508 Type M.

