

iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

DIN 3016 P-Clip Form D

DIN 3016 Rubber lined P-Clips are manufactured from steel strips lined with EPDM rubber. This rubber liner ensures a safe tight-fitting assembly, protects the application area and prevent possible damage caused by vibration. The screw holes are reinforced with metal plates to guarantee a solid grip. P-Clips are recommended for fastening pipes, hoses and conduits in many different applications.



W4

12 mm Band

Denomination	Part Number	Diameter Application	Band Width a	d	For Metric Screw	Box Quantity (MOQ)	Outer Packing
AGID 5/12	43003859	5	12	5,3	M.5	500	2000
AGID 6/12	43003867	6	12	5,3	M.5	500	500
AGID 7/12	43003875	7	12	5,3	M.5	500	500
AGID 8/12	43003883	8	12	5,3	M.5	500	500
AGID 9/12	43003891	9	12	5,3	M.5	500	500
AGID 10/12	43003904	10	12	5,3	M.5	500	500
AGID 11/12	43003911	11	12	5,3	M.5	500	500
AGID 12/12	43003920	12	12	5,3	M.5	500	500
AGID 13/12	43003939	13	12	5,3	M.5	500	500
AGID 14/12	43003947	14	12	5,3	M.5	500	500
AGID 15/12	43003955	15	12	5,3	M.5	500	500
AGID 16/12	43003963	16	12	5,3	M.5	200	800
AGID 17/12	43003971	17	12	5,3	M.5	200	800
AGID 18/12	43003980	18	12	5,3	M.5	200	200
AGID 19/12	43003998	19	12	5,3	M.5	200	800
AGID 20/12	43004000	20	12	5,3	M.5	200	800
AGID 21/12	43004018	21	12	5,3	M.5	100	400
AGID 22/12	43004026	22	12	5,3	M.5	100	400
AGID 23/12	43004034	23	12	5,3	M.5	100	400
AGID 24/12	43004042	24	12	5,3	M.5	100	400
AGID 25/12	43004050	25	12	5,3	M.5	100	400
AGID 26/12	43004069	26	12	5,3	M.5	100	400
AGID 27/12	43004077	27	12	5,3	M.5	100	400
AGID 28/12	43004085	28	12	5,3	M.5	100	400
AGID 30/12	43004100	30	12	5,3	M.5	100	100
AGID 35/12	43004155	35	12	5,3	M.5	100	100
AGID 40/12	43004200	40	12	5,3	M.5	100	100
AGID 47/12	43004276	47	12	5,3	M.5	50	50


DIN 3016 P-Clip Form D


P-Clips are recommended for fastening pipes, hoses and conduits in many different applications.



15 mm Band

Denomination	Part Number	Diameter Application	Band Width a	d	For Metric Screw	Box Quantity (MOQ)	Outer Packing
AGID 5/15	43004659	5	15	6,4	M.6	500	500
AGID 6/15	43004667	6	15	6,4	M.6	500	500
AGID 8/15	43004683	8	15	6,4	M.6	500	500
AGID 9/15	43004696	9	15	6,4	M.6	500	500
AGID 10/15	43004704	10	15	6,4	M.6	500	500
AGID 11/15	43004712	11	15	6,4	M.6	200	1600
AGID 12/15	43004720	12	15	6,4	M.6	200	200
AGID 13/15	43004739	13	15	6,4	M.6	200	200
AGID 14/15	43004747	14	15	6,4	M.6	200	200
AGID 15/15	43004755	15	15	6,4	M.6	200	200
AGID 16/15	43004763	16	15	6,4	M.6	200	200
AGID 17/15	43004771	17	15	6,4	M.6	200	200
AGID 18/15	43004780	18	15	6,4	M.6	200	200
AGID 19/15	43004798	19	15	6,4	M.6	200	200
AGID 20/15	43004800	20	15	6,4	M.6	200	200
AGID 21/15	43004819	21	15	6,4	M.6	200	200
AGID 22/15	43004827	22	15	6,4	M.6	200	200
AGID 23/15	43004835	23	15	6,4	M.6	100	100
AGID 25/15	43004851	25	15	6,4	M.6	100	100

	TECHNICAL INFORMATION	
	MATERIAL	STAINLESS STEEL - AISI 304
	FINISH	STAINLESS STEEL
	TEMPERATURE RESISTANCE	-40 + 120 °C

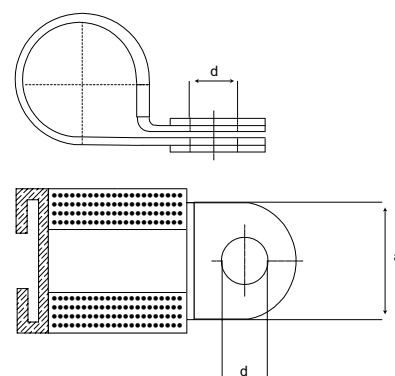

DIN 3016 P-Clip Form D


P-Clips are recommended for fastening pipes, hoses and conduits in many different applications.



15 mm Band

Denomination	Part Number	Diameter Application	Band Width a	d	For Metric Screw	Box Quantity (MOQ)	Outer Packing
AGID 26/15	43004860	26	15	6,4	M.6	100	100
AGID 27/15	43004878	27	15	6,4	M.6	100	100
AGID 28/15	43004886	28	15	6,4	M.6	100	100
AGID 30/15	43004907	30	15	6,4	M.6	100	100
AGID 32/15	43004923	32	15	6,4	M.6	100	100
AGID 33/15	43004931	33	15	6,4	M.6	100	100
AGID 34/15	43004940	34	15	6,4	M.6	100	100
AGID 35/15	43004958	35	15	6,4	M.6	100	100
AGID 36/15	43004966	36	15	6,4	M.6	100	100
AGID 37/15	43004974	37	15	6,4	M.6	100	100
AGID 38/15	43004982	38	15	6,4	M.6	100	100
AGID 40/15	43005002	40	15	6,4	M.6	100	100
AGID 45/15	43005053	45	15	6,4	M.6	50	400
AGID 46/15	43005064	46	15	6,4	M.6	50	50
AGID 50/15	43005109	50	15	6,4	M.6	50	50
AGID 54/15	43005141	54	15	6,4	M.6	50	50
AGID 60/15	43005205	60	15	6,4	M.6	50	50
AGID 63/15	43005230	63	15	6,4	M.6	50	50
AGID 75/15	43005352	75	15	6,4	M.6	20	80

TECHNICAL INFORMATION	
MATERIAL	STAINLESS STEEL - AISI 304
FINISH	STAINLESS STEEL
TEMPERATURE RESISTANCE	-40 + 120 °C

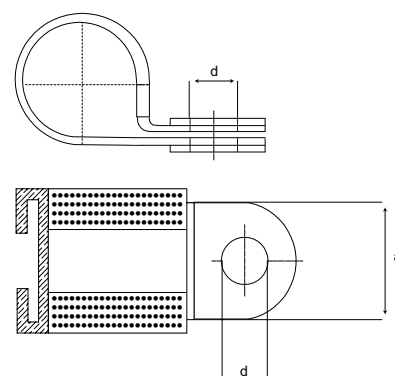

DIN 3016 P-Clip Form D


P-Clips are recommended for fastening pipes, hoses and conduits in many different applications.




W4

20 mm Band

Denomination	Part Number	Diameter Application	Band Width a	d	For Metric Screw	Box Quantity (MOQ)	Outer Packing
AGID 8/20	43005506	8	20	8,40	M.8	250	250
AGID 10/20	43005507	10	20	8,40	M.8	200	200
AGID 11/20	43005512	11	20	8,40	M.8	200	200
AGID 12/20	43005520	12	20	8,40	M.8	200	200
AGID 13/20	43005539	13	20	8,40	M.8	200	200
AGID 14/20	43005547	14	20	8,40	M.8	200	200
AGID 15/20	43005555	15	20	8,40	M.8	200	200
AGID 16/20	43005563	16	20	8,40	M.8	100	100
AGID 18/20	43005571	18	20	8,40	M.8	100	100
AGID 19/20	43005580	19	20	8,40	M.8	100	100
AGID 20/20	43005598	20	20	8,40	M.8	100	100
AGID 21/20	43005600	21	20	8,40	M.8	100	100
AGID 22/20	43005619	22	20	8,40	M.8	100	100
AGID 23/20	43005627	23	20	8,40	M.8	50	50
AGID 24/20	43005635	24	20	8,40	M.8	100	100
AGID 25/20	43005643	25	20	8,40	M.8	100	100
AGID 26/20	43005652	26	20	8,40	M.8	100	100
AGID 27/20	43005661	27	20	8,40	M.8	100	100
AGID 28/20	43005670	28	20	8,40	M.8	100	100
AGID 29/20	43005688	29	20	8,40	M.8	100	100
AGID 30/20	43005696	30	20	8,40	M.8	50	50

TECHNICAL INFORMATION	
	MATERIAL STAINLESS STEEL - AISI 304
	FINISH STAINLESS STEEL
	TEMPERATURE RESISTANCE -40 + 120 °C

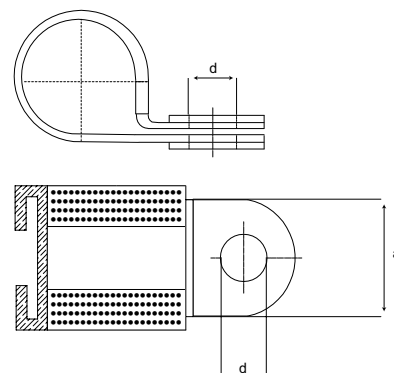

DIN 3016 P-Clip Form D


P-Clips are recommended for fastening pipes, hoses and conduits in many different applications.




W4

20 mm Band

Denomination	Part Number	Diameter Application	Band Width a	d	For Metric Screw	Box Quantity (MOQ)	Outer Packing
AGID 32/20	43005715	32	20	8,40	M.8	50	50
AGID 34/20	43005731	34	20	8,40	M.8	50	50
AGID 35/20	43005740	35	20	8,40	M.8	50	50
AGID 36/20	43005758	36	20	8,40	M.8	50	50
AGID 38/20	43005774	38	20	8,40	M.8	50	50
AGID 40/20	43005790	40	20	8,40	M.8	50	50
AGID 42/20	43005811	42	20	8,40	M.8	50	50
AGID 44/20	43005833	44	20	8,40	M.8	50	50
AGID 45/20	43005844	45	20	8,40	M.8	50	50
AGID 48/20	43005877	48	20	8,40	M.8	50	50
AGID 50/20	43005899	50	20	8,40	M.8	50	50
AGID 52/20	43005911	52	20	8,40	M.8	50	50
AGID 54/20	43005933	54	20	8,40	M.8	50	50
AGID 60/20	43005944	60	20	8,40	M.8	50	50
AGID 63/20	43006022	63	20	8,40	M.8	50	50
AGID 66/20	43006054	66	20	8,40	M.8	50	50
AGID 70/20	43006099	70	20	8,40	M.8	25	25
AGID 73/20	43006131	73	20	8,40	M.8	25	200
AGID 77/20	43006160	77	20	8,40	M.8	25	25
AGID 90/20	43006290	90	20	8,40	M.8	25	25
AGID 98/20	43006299	98	20	8,40	M.8	100	100

	TECHNICAL INFORMATION	
	MATERIAL	STAINLESS STEEL - AISI 304
	FINISH	STAINLESS STEEL
	TEMPERATURE RESISTANCE	-40 + 120 °C

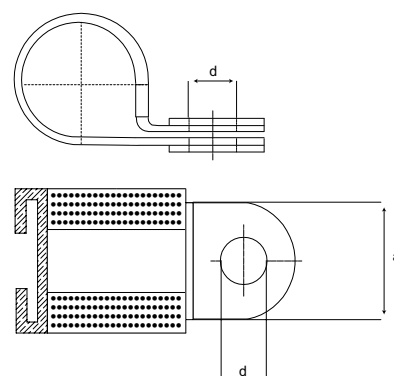


DIN 3016 P-Clip Form D


P-Clips are recommended for fastening pipes, hoses and conduits in many different applications.



25 mm Band

Denomination	Part Number	Diameter Application	Band Width a	d	For Metric Screw	Box Quantity (MOQ)	Outer Packing
AGID 10/25	43006300	10	25	10,50	M.10	100	100
AGID 14/25	43006333	14	25	10,50	M.10	100	100
AGID 18/25	43006377	18	25	10,50	M.10	100	100
AGID 20/25	43006395	20	25	10,50	M.10	100	100
AGID 28/25	43006477	28	25	10,50	M.10	50	50
AGID 35/25	43006544	35	25	10,50	M.10	50	50
AGID 46/25	43006672	46	25	10,50	M.10	25	25
AGID 50/25	43006716	50	25	10,50	M.10	25	25
AGID 60/25	43006791	60	25	10,50	M.10	25	25
AGID 70/25	43006891	70	25	10,50	M.10	25	25

	TECHNICAL INFORMATION	
	MATERIAL	STAINLESS STEEL - AISI 304
	FINISH	STAINLESS STEEL
	TEMPERATURE RESISTANCE	-40 + 120 °C

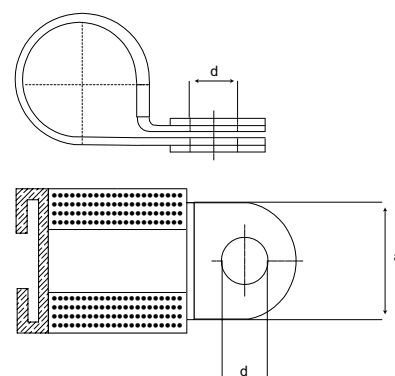



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands