

iQparts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

W2



SUPRA W2 Hose Clamp AISI 430 Stainless Steel

Due to its revolutionary swivelling bridge, Supra W2 can be mounted in the most awkward applications without having to remove the hose. It can be opened and fastened again when in place without dislodging any other parts of the clamp, making assembly much easier.

The high-strength bolt designed and manufactured by Mikalor specifically for this clamp, together with the captive nut and spacer system allow you to clamp the most demanding of hose assemblies. This is the clamp of choice for professionals in the industrial hose, automotive and agricultural machinery sectors as well as in all industrial applications where an outstanding and above all reliable heavy-duty clamp is required.

* Fully complies with **RoHs EU Directive 2002/95/EC** dated 1st July 2006 and all its amendments.


*** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling**


Ø Application	Part Number	Metric	Ø D +1 -0.5	A ±0.3	S ±0.3	B ±0.5	E ±0.2	Maximum values		Box Quantity	Outer Box Quantity
								Pressure (Bar)	Par (Nm)		
17-18	03019010	M6	18	18	0,6	19,8	8	45	10	50	400
18-19	03019011	M6	19	18	0,6	19,8	8	45	10	50	400
19-21	03019020	M6	21	18	0,6	19,8	8	45	10	50	400
21-23	03019039	M6	23	18	0,6	19,8	8	45	10	50	400
23-25	03019047	M6	25	18	0,6	19,8	8	45	10	50	400
25-27	03019055	M6	27	18	0,6	19,8	8	45	10	50	400
27-29	03019063	M6	29	18	0,6	19,8	8	45	10	50	200
29-31	03019071	M7	31	20	0,8	22,0	10	40	13	50	50
31-34	03019080	M7	34	20	0,8	22,0	10	40	13	50	50
34-37	03019098	M7	37	20	0,8	22,0	10	40	13	50	50
37-40	03019100	M7	40	20	0,8	22,0	10	40	13	50	50
40-43	03019119	M7	43	20	0,8	22,0	10	40	13	50	50
43-47	03019127	M7	47	20	0,9	22,0	10	36	16	50	50
47-51	03019135	M7	51	20	0,9	22,0	10	36	16	50	50
51-55	03019143	M7	55	20	0,9	22,0	10	36	16	25	25
55-59	03019151	M7	59	20	0,9	22,0	10	36	16	25	25
59-63	03019160	M7	63	20	0,9	22,0	10	36	16	25	25
63-68	03019178	M7	68	20	0,9	22,0	10	36	16	25	25
68-73	03019186	M8	73	25	1,0	27,5	13	28	30	25	25
73-79	03019194	M8	79	25	1,0	27,5	13	28	30	25	25
79-85	03019207	M8	85	25	1,0	27,5	13	28	30	25	25
85-91	03019215	M8	91	25	1,0	27,5	13	20	30	25	25
91-97	03019223	M8	97	25	1,0	27,5	13	20	30	25	25
97-104	03019231	M8	104	25	1,0	27,5	13	20	30	25	25
104-112	03019240	M8	112	25	1,0	27,5	13	12	30	25	25
112-121	03019258	M8	121	25	1,0	27,5	13	12	30	25	25
121-130	03019266	M8	130	25	1,0	27,5	13	12	30	25	25
130-140	03019274	M10	140	28	1,2	31,0	15	9	45	10	10
140-150	03019282	M10	150	28	1,2	31,0	15	9	45	10	10

								Maximum values			
Ø Application	Part Number	Metric	Ø D +1 -0.5	A ±0.3	S ±0.3	B ±0.5	E ±0.2	Pressure (Bar)	Par (Nm)	Box Quantity	Outer Box Quantity
150-162	03019290	M10	162	28	1,2	31,0	15	9	45	10	10
162-174	03019303	M10	174	28	1,2	31,0	15	6	45	10	10
174-187	03019311	M10	187	28	1,2	31,0	15	6	45	10	10
187-200	03019320	M10	200	28	1,2	31,0	15	6	45	10	10
200-213	03019338	M10	213	28	1,2	31,0	15	3	45	10	10
213-226	03019346	M10	226	28	1,2	31,0	15	3	45	10	10
226-239	03019354	M10	239	28	1,2	31,0	15	3	45	10	10
239-252	03019362	M10	252	28	1,2	31,0	15	3	45	10	10
252-265	03019370	M10	265	28	1,2	31,0	15	3	45	10	10
265-278	03019477	M10	278	28	1,2	31,0	15	3	45	10	10
278-291	03019392	M10	291	28	1,2	31,0	15	3	45	10	10
291-304	03019403	M10	304	28	1,2	31,0	15	3	45	10	10
304-317	03019411	M10	317	25	1,2	31,0	15	3	45	10	10
317-330	03019485	M10	330	25	1,2	31,0	15	3	45	10	10
330-343	03019422	M10	343	25	1,2	31,0	15	3	45	10	10
343-356	03019433	M10	356	25	1,2	31,0	15	3	45	10	10
356-369	03019444	M10	369	25	1,2	31,0	15	3	45	10	10
369-382	03019455	M10	382	25	1,2	31,0	15	3	45	10	10
382-395	03019499	M10	395	28	1,2	31,0	15	3	45	10	10
395-408	03019500	M10	408	28	1,2	31,0	15	3	45	10	10

* It is recommended to apply 75% of the maximum values contained in the table.

* Special dimensions can be manufactured on request.

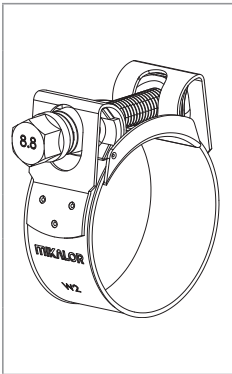	TECHNICAL INFORMATION	
	MATERIAL	STAINLESS STEEL W2 AISI 430 X6Cr17 BAND (DIN 1.4016) STEEL 19MnB4 SCREW (EN-10269) ZINC-PLATED Cr3
	FINISH	STAINLESS STEEL
	CORROSION RESISTANCE	72 HOURS SALT SPRAY ASTM B-117
	MAX. TIGHTENING SPEED (RPM)	540 ± 5

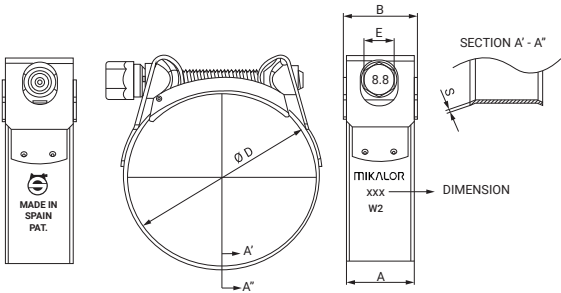



iq
parts
IQ-PARTS-SHOP.COM

info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands