


iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

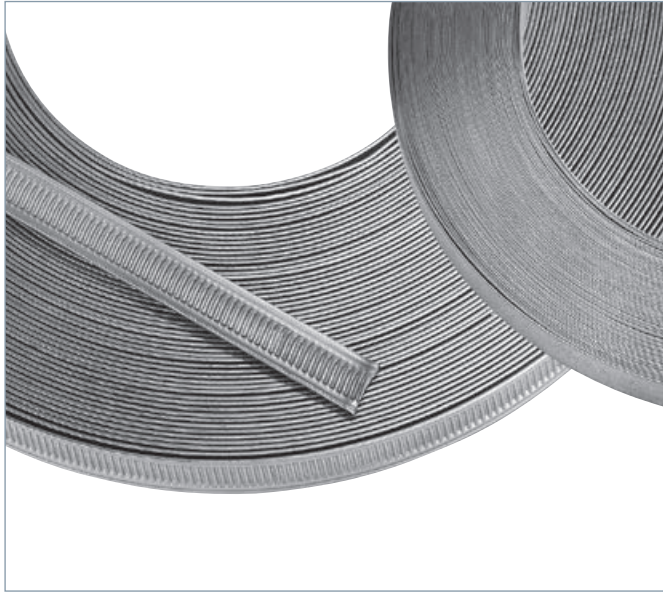

Continuous band available in smooth version or with thread stamping throughout

4 different closure types to suit a huge variety of applications



Continuous band clamping system

Consisting of a continuous band, the NORMAFIX® NORMETTA® system is able to adapt itself to the shape and size of various objects. 4 different types of closure are available to choose from. The system is particularly suitable for carrying out retaining and repair work under difficult and extreme conditions.

Advantages at a glance

- ✓ Flexible and versatile
- ✓ Can be installed under difficult conditions

Materials

W1	W2	W3	W4	W5
	x	x	x	

Applications

- Irrigation systems
- Railway industry
- Building machines
- Pump and filter
- Retaining applications; sealing pipes during repair work
- Attaching signs and containers
- Binding hoses



Product and closure types

The continuous band is available in three different versions: smooth band, stamped band or perforated band. Depending on the version, you will have a different choice of band widths, material grades and closure types.

Smooth band



To be used with the buckles, NB-D W4 and NB-H W4.

NORMAFIX® NORMETTA® SMOOTH BAND					
Width in mm	Thickness in mm	Designation	Length in m	W4 Product No.	
9	0.5	NORMETTA SMOOTH BAND 30M/9 W4	30	0560 8554 009	
13	0.7	NORMETTA SMOOTH BAND 30M/13 W4	30	0560 8553 013	
16	0.7	NORMETTA SMOOTH BAND 30M/16 W4	30	0560 8553 016	
19	0.7	NORMETTA SMOOTH BAND 30M/19 W4	30	0560 8553 019	

Stamped band



To be used with the buckles NB-G W3.

NORMAFIX® NORMETTA® STAMPED BAND					
Width in mm	Thickness in mm	Designation	Length in m	Resistance to traction in N	W3 Product No.
12	0.8	NORMETTA STAMPED BAND 30M/12 W3	30	2600 N	0560 8566 003

Perforated Band



To be used with buckles NB-K W2.

NORMAFIX® NORMETTA® PERFORATED BAND						
Width in mm	Thickness in mm	Designation	Length in m	Resistance to traction in N	W2 Product No.	W4 Product No.
8	0.6	NORMETTA PERFORATED BAND 25M/8 W2	25	790 N	0817 7020 001	
	0.6	NORMETTA PERFORATED BAND 25M/8 W4	25	790 N		0817 7022 001
13	0.6	NORMETTA PERFORATED BAND 25M/13 W4	25	850 N		0817 7022 002
14	0.6	NORMETTA PERFORATED BAND 25M/14 W2	25	850 N	0817 7020 002	

NORMETTA® – CLOSURE TYPES

NB-D



Closure type NB-D

Suitable for attaching signs and containers to pipes and hoses as well as binding hoses.
For bands: 9, 13, 16, 19 mm

Required tools: Clamping and cutting tool; hammer

NORMAFIX® NB-D		
For band width in mm	Designation	W4 Product No.
9	NB-D/9	0560 8550 009
13	NB-D/13	0560 8550 013
16	NB-D/16	0560 8550 016
19	NB-D/19	0560 8550 019

NB-G



Closure type NB-G

Suitable for applications with cramped installation conditions.
Can be re-used.

For stamped bands.

Required tools: Screwdriver or SW7 socket wrench and plate shears

NORMAFIX® NB-G		
For band width in mm	Designation	W3 Product No.
12	NB-G/12	0560 8565 003

NB-H



Closure type NB-H

An adjustable quick-release closure that enables fast and easy installation and removal. Can be re-used.

For bands: 16, 19 mm

Required tools: Screwdriver and plate shears

NORMAFIX® NB-H			
For band width in mm	Maximum diameter in mm	Designation	W1 Product No.
16 / 19	124	NB-H/124	0560 8558 124
	400	NB-H/400	0560 8558 400
	800	NB-H/800	0560 8558 800

NB-K



Closure type NB-K

Suitable for fixing suspended ventilation tubes.

For bands: 8, 13, 14 mm

Required tools: Screwdriver

NORMAFIX® NB-K			
For band width in mm	Designation	W2 Product No.	W4 Product No.
8	NB-K/8	0817 7019 003	0817 7021 003
13	NB-K/13		0817 7021 004
14	NB-K/14	0817 7019 004	



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands