

iQ parts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**


NORMACLAMP® Quick Lock



Quick and easy installation

- ✓ Safe joint with the hose
- ✓ Clamping range from 25-40 up to 60-1300 mm
- ✓ Flexibility
- ✓ Smooth edges prevent damage to the pipe

NORMACLAMP® Quick Lock

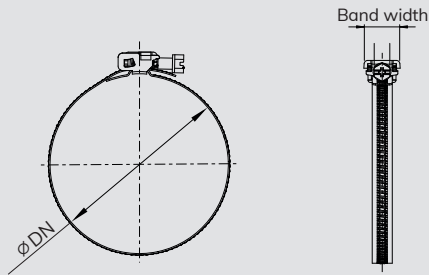

Applications

Quick Lock is well suited to applications involving poly and braided tubing that require a complete seal, e.g. for:

- Water industry
- Air conditioning
- Sanitary
- Construction

Materials

| | |
|----------------|---|
| Group | W2B and W4 |
| Band | W2B (SS – AISI 430) and W4 (SS – AISI 304) |
| Housing | W2B (Galvanized steel) and W4 (SS – AISI 304) |

| Band width (mm) | Description | Clamping range \varnothing DN (mm) | Part number | | Packaging quantity (pcs) |
|-----------------|----------------------|--------------------------------------|---------------|---------------|--------------------------|
| | | | W2B | W4 | |
| 9 | Quick Lock 25-45/9 | 25-45 | 0815 6120 045 | – | 100 |
| 9 | Quick Lock 40-60/9 | 40-60 | 0815 6120 060 | – | 100 |
| 9 | Quick Lock 60-90/9 | 60-90 | 0815 6120 090 | – | 50 |
| 9 | Quick Lock 60-110/9 | 60-110 | 0815 6120 110 | 0815 6130 110 | 50 |
| 9 | Quick Lock 60-135/9 | 60-135 | 0815 6120 135 | 0815 6130 135 | 50 |
| 9 | Quick Lock 60-145/9 | 60-145 | 0815 6120 145 | 0815 6130 145 | 50 |
| 9 | Quick Lock 60-170/9 | 60-170 | – | 0815 6130 170 | 50 |
| 9 | Quick Lock 60-175/9 | 60-175 | 0815 6120 175 | – | 50 |
| 9 | Quick Lock 60-215/9 | 60-215 | 0815 6120 215 | 0815 6130 215 | 50 |
| 9 | Quick Lock 60-270/9 | 60-270 | 0815 6120 270 | 0815 6130 270 | 50 |
| 9 | Quick Lock 60-325/9 | 60-325 | 0815 6120 325 | 0815 6130 325 | 50 |
| 9 | Quick Lock 60-380/9 | 60-380 | 0815 6120 380 | 0815 6130 380 | 50 |
| 9 | Quick Lock 60-425/9 | 60-425 | 0815 6120 425 | 0815 6130 425 | 50 |
| 9 | Quick Lock 60-525/9 | 60-525 | 0815 6120 525 | 0815 6130 525 | 50 |
| 9 | Quick Lock 60-660/9 | 60-660 | 0815 6120 660 | 0815 6130 660 | 50 |
| 12 | Quick Lock 50-110/12 | 50-110 | 0815 6020 080 | | 50 |
| 12 | Quick Lock 50-130/12 | 50-130 | 0815 6020 090 | | 50 |
| 12 | Quick Lock 50-145/12 | 50-145 | 0815 6020 098 | | 50 |
| 12 | Quick Lock 50-165/12 | 50-165 | 0815 6020 108 | | 50 |
| 12 | Quick Lock 50-175/12 | 50-175 | 0815 6020 113 | | 50 |
| 12 | Quick Lock 50-215/12 | 50-215 | 0815 6020 133 | | 50 |
| 12 | Quick Lock 50-280/12 | 50-280 | 0815 6020 165 | | 50 |
| 12 | Quick Lock 50-325/12 | 50-325 | 0815 6020 188 | | 50 |
| 12 | Quick Lock 50-370/12 | 50-370 | 0815 6020 210 | | 50 |
| 12 | Quick Lock 50-425/12 | 50-425 | 0815 6020 238 | | 50 |
| 12 | Quick Lock 60-525/12 | 60-525 | 0815 6020 293 | | 50 |
| 12 | Quick Lock 70-625/12 | 70-625 | 0815 6020 348 | | 50 |


Technical benefits

- ✓ Screw housing for easy tightening
- ✓ 'In-line' housing, which enables every thread on the worm to engage with the band
- ✓ Perforated band
- ✓ Safety buckle, keeping the band aligned

NORMACLAMP® Quick Lock is part of a broad portfolio. Discover more!



Hi-torque clamp

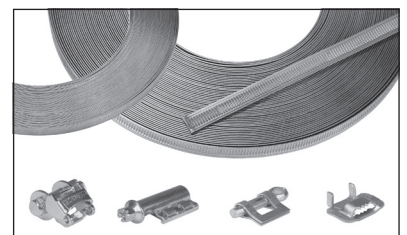

Normetta



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands