

iQ parts
IQ-PARTS-SHOP.COM




**SPECS &
INFORMATION**

TRANSPORT PNEUMATIQUE PHASE DILUÉE EN ASPIRATION OU REFOULEMENT PRODUITS LÉGERS

PNEUMATIC CONVEYING (DILUTED CONCENTRATION LIGHT PARTICLES)
VACUUM OR PRESSURE SYSTEMS



L	100 mm
∅	38.1 <> 114.3 mm
Boulons Bolts	M8
Serrage Tightening	16 N.m

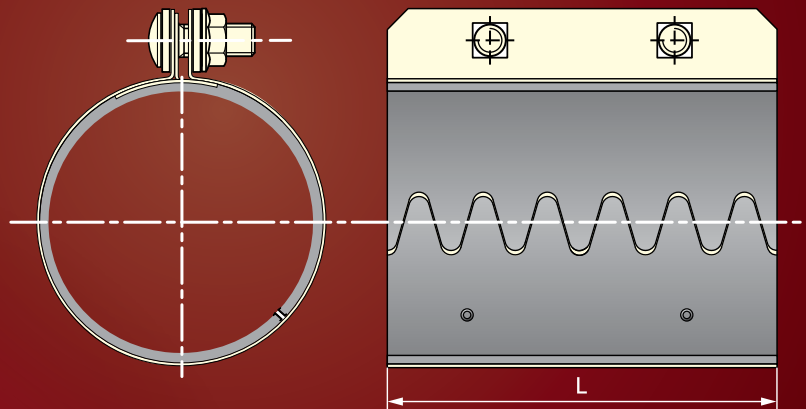

DESCRIPTIF STANDARD

- Enveloppe extérieure inox 430
- Joint SBR noir -30°C/+80°C
- Boulons zingués
- Conductivité avec œillet

SPECIFICATION OF STANDARD COUPLING

- Outside skin in stainless steel 430
- Black SBR gasket -30°C/+80°C
- Zinc plated bolts
- Conductivity with eyelet

OPTIONS

- Version tout inox 304L
- Joint NBR blanc FDA -30°C/+110°C; Règlement Européen 1935/2004 CE et REACH 1907/2006 CE
- Joint silicone VMQ -65°C/+225°C
- Joint silicone détectable bleu -40°C/+180°C
- Joint Viton FKM noir -20°C/+250°C
- Raccord pont (voir p. 5)
- Raccord pour 2 diamètres différents (voir p. 5)
- Lamelle de conductivité cuivre CU A1
- Anneau protecteur conductif inox 304L (voir p. 5)

OPTIONS

- All stainless steel 304L version
- White NBR gasket FDA -30°C/+110°C; European Regulation 1935/2004 CE and REACH 1907/2006 CE
- Silicone VMQ gasket -65°C/+225°C
- Blue silicone gasket -40°C/+180°C
- Viton FKM gasket -20°C/+250°C
- Coupling with clamp and side bars (see p. 5)
- Coupling for two tubes with different diameters (see p. 5)
- Conductivity strip in copper CU A1
- Conductive protecting ring in stainless steel 304L (see p. 5)


- Référence réglementaire - Reference to regulation: **N°97/23/CE.G2 Art.3 §3**
- Exemple de marquage du produit - Example of product marking: **EURAC® L D 54**

COURBES PRESSION MAXIMUM EURAC L: L 100
 MAXIMUM PRESSURE CURVES FOR EURAC L: L100



Pression maximum de service tuyauterie libre
 Maximum working pressure with free-hanging pipes

Pression maximum de service tuyauterie bloquée
 Maximum working pressure with clamped pipes

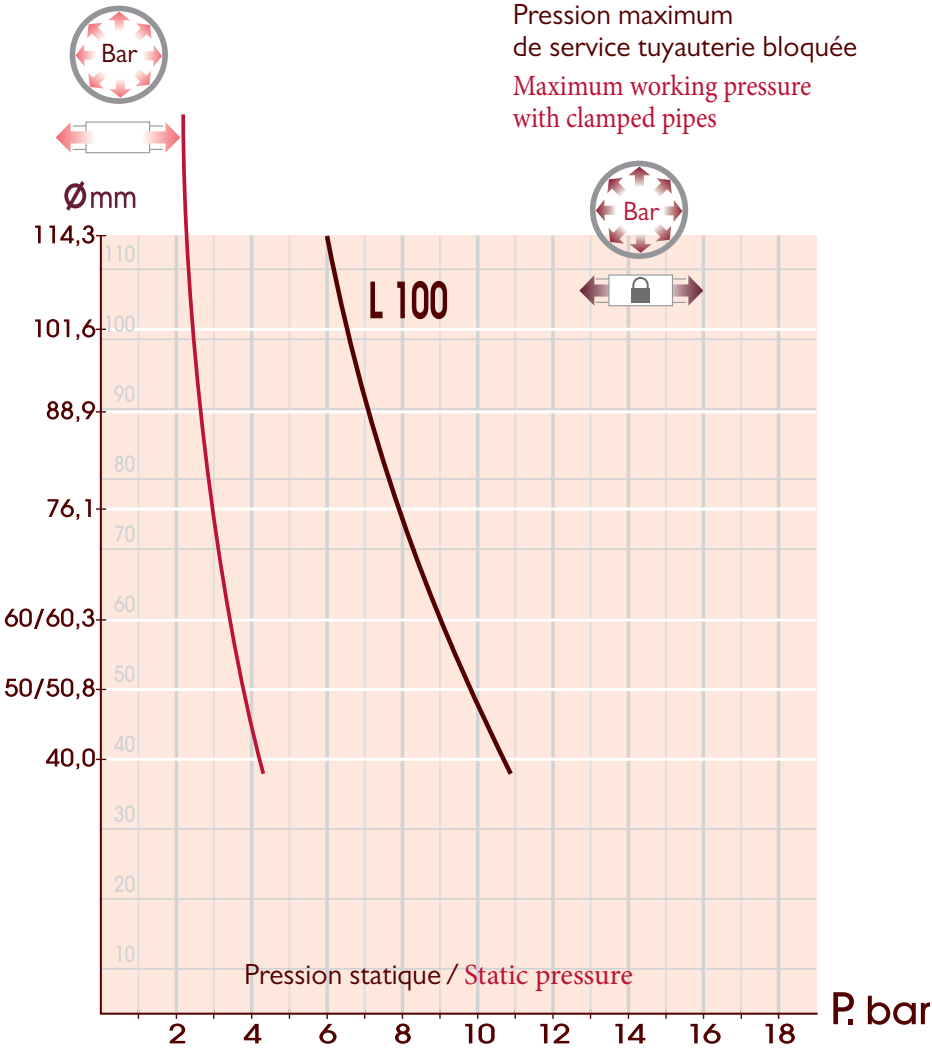


Ø	L100
38,1	On stock
40	On stock
45	On stock
50/50,8	On stock
54	On stock
55	On stock
60/60,3	On stock
63,5	On stock
65	On stock
70	On stock
75	On stock
76,1	On stock
80	On stock
82	On stock
84	On stock
85	On stock
88,9	On stock
95	On stock
100	On stock
101,6	On stock
104	On stock
105	On stock
108	On stock
114,3	On stock

En stock - On stock
 Sur commande - On order

OPTIONS - OPTIONS


- Raccord pont
Coupling with clamp and side bars



- Anneau protecteur conducteur inox 304L
Conductive protection ring in stainless steel 304L



- Raccord pour 2 diamètres différents
Coupling for two tubes with different diameters





info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands