

iQparts
IQ-PARTS-SHOP.COM



**SPECS &
INFORMATION**

VENTED LOOPS WITH SOLENOID

Designed and made in New Zealand, Tru-Design Vented Loops with Solenoid are the superior composite siphon break solutions for marine applications. Vented Loops prevent water siphoning from underwater skin fittings back into a vessel and thereby guard against accidental flooding and sinking.



Vented Loops are used predominantly in toilet to overboard applications, toilet inlet applications and holding tank to overboard applications.

A Solenoid controlled Vented Loop allows the vent to be switched to fully closed. This eliminates air entering the system as occurs with a standard vented loop. The solenoid used is normally open, requiring power only to close the valve.

Vented Loops are moulded from a glass reinforced nylon composite. High strength, high-modulus glass fibres impregnated into the nylon provides dramatic strength, stiffness, toughness, and dimensional stability to our loops.

Part Numbers and Description

| Part # | Description |
|--------|---|
| 90462 | Vented Loop w Solenoid 12VDC19mm White |
| 90463 | Vented Loop w Solenoid 12VDC 25mm White |
| 90464 | Vented Loop w Solenoid 12VDC 38mm White |
| 90624 | Vented Loop w Solenoid 24VDC 19mm White |
| 90625 | Vented Loop w Solenoid 24VDC 25mm White |
| 90626 | Vented Loop w Solenoid 24VDC 38mm White |

Key Features

| Feature : | |
|--|--|
| Manufactured from a glass reinforced nylon composite | High strength and light weight. |
| Robust polymer covered solenoid | Long life in the marine environment |
| Diaphragm valve | Faster breaking of siphon due to larger flow rate available, |
| Female threaded Solenoid Valve | No brass/bronze adapter to corrode |
| Constant internal diameter | No reduction in flow |
| Self-contained mounting | 3 screw mounting posts give secure and easy installation. |
| Chemical resistant | Impervious to diesel, petrol and antifouling paints. |
| UV resistant | These fittings will not break down with ultraviolet light or discolour from the sun. |
| High quality surface finish | Will not discolour with green film as similar bronze fittings do. |
| Large operating temperature range | Suitable for all marine environments, from -40°C to +110°C. |

Specifications


The Solenoid valve is normally open. Apply power to close the valve. With electric toilets this is usually achieved by wiring into the same circuit as the pump.

Solenoid valve is supplied with flying leads for easy installation.

| Supply Voltage | 12V DC | 24V DC |
|-------------------|--------|--------|
| Operating Current | 710mA | 185mA |

Dimensions

All dimensions in mm. All dimensions nominal.

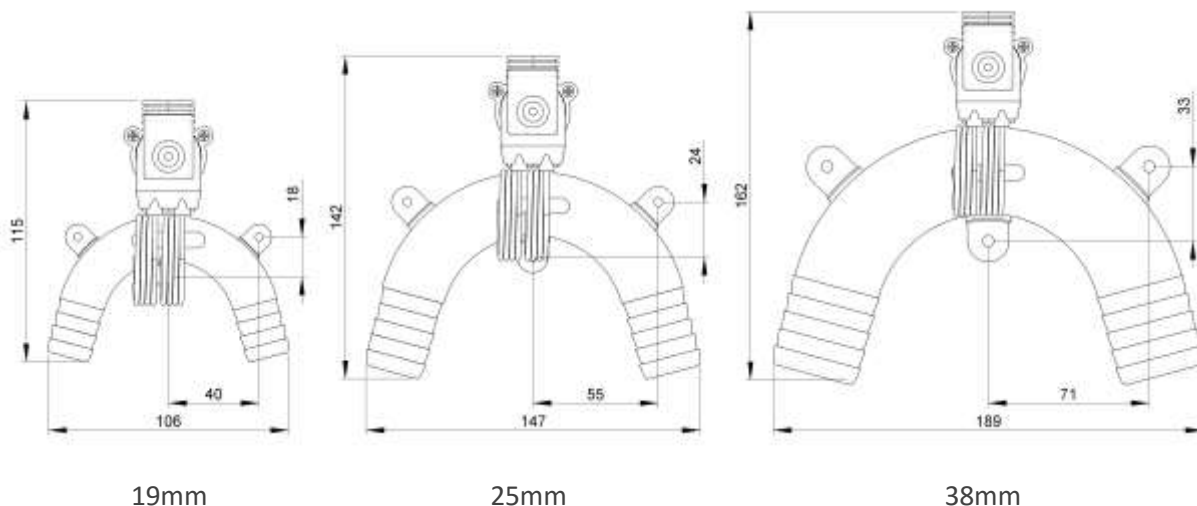

Installation

Full installation instructions are supplied with the Vented Loop with Solenoid.

It is recommended that all Vented Loops are placed in a protected location to minimize the chance of inadvertent damage.

The Vented Loop should be mounted a minimum of 250mm (1') above the heeled water line. If mounted below the waterline, the vented loop will not leak, but will not provide any protection.

The vented loop should be screwed to a bulkhead or other robust structure using the integral feet.

Dual hose clamps should be fitted to ensure the hose does not become disengaged from the Vented Loop.

Servicing

Hose clamps should be checked for secure connection of the hoses to the Vented Loop.

Regular checks of the functioning of the Solenoid valve should be conducted. Unscrew the cap and remove the valve (taking note of orientation). Inspect the valve for buildups and clean if required. Operate the valve connected to a hose or tap to check for correct operation (note arrow for flow direction). Check the port in the top of the vented loop for blockages and clear if required.

If the valve is damaged, a spare Solenoid Valve is available.

| Part # | Description |
|--------|----------------------|
| 90467 | Solenoid Valve 12VDC |
| 90534 | Solenoid Valve 24VDC |

The information contained in this information sheet is for general information purposes only. The information is provided by TRUDESIGN™ and while we endeavour to keep the information up to date and correct, we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability. Any reliance you place on such information is therefore strictly at your own risk.



iq
parts
IQ-PARTS-SHOP.COM

info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands