

iQ parts
IQ-PARTS-SHOP.COM




**SPECS &
INFORMATION**



FLEXADUX®

Light weight, double-ply Neoprene ducting

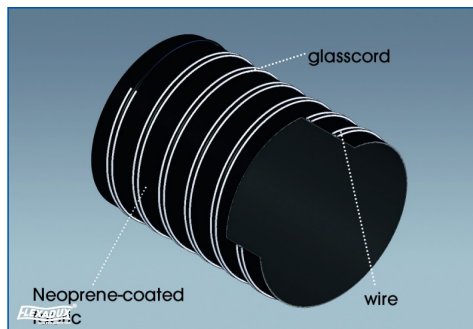

Material:

Neoprene- coated glass fabric, 2-ply.

Colour:

Black.

Single Length:

4 m. (Special lengths available on request)

Temperature Resistance:

- 35°C up to + 135°C (interm. up to + 150°C).

Applications:

Suction and transport of air and gases, in plastic industry, vehicle and engine construction.

Properties:

Very good flexibility, good chemical resistance, smooth bore, UV- resistant.

Special Construction:

- With spiral free cuffs
- With polyester- fabric.

TECHNICAL DATA

ID (mm)	OD (mm)	Weight (kg/m)	Bend. Radius (mm)	max. Work.press. (bar)	max. Vacuum (bar)
13	15,6	0,09	13	2,60	0,70
19	21,6	0,10	19	2,50	0,70
22	25,2	0,13	22	2,50	0,70
25	28,2	0,15	25	2,50	0,70
32	35,2	0,18	32	2,50	0,58
38	41,2	0,21	38	2,40	0,58
41	44,2	0,24	41	2,40	0,58
44	47,2	0,26	44	2,40	0,58
51	54,7	0,29	51	2,40	0,53
55	58,7	0,30	55	2,30	0,53
57	60,7	0,33	57	2,30	0,53
60	63,7	0,34	60	2,20	0,53
63	66,7	0,36	63	2,20	0,46
65	68,7	0,38	65	2,20	0,46
70	73,7	0,44	70	2,20	0,46
76	79,7	0,47	76	2,10	0,44
80	83,7	0,49	80	2,10	0,40
83	86,7	0,51	83	2,10	0,40
90	93,7	0,55	90	2,00	0,40
95	98,7	0,57	95	2,00	0,40
102	106,2	0,61	102	1,80	0,35
108	112,2	0,74	108	1,80	0,30
110	113,2	0,76	110	1,70	0,30
114	118,2	0,79	114	1,70	0,28
120	124,2	0,81	120	1,50	0,21
127	131,7	0,86	127	1,50	0,21
140	144,7	0,95	140	1,40	0,18
152	157,2	1,10	152	1,10	0,17
160	165,2	1,15	160	0,90	0,15
165	170,2	1,17	165	0,90	0,14
178	183,2	1,28	178	0,80	0,14
180	185,2	1,30	180	0,80	0,14



FLEXADUX®

**Light weight, double-ply
Neoprene ducting**



TECHNICAL DATA

ID (mm)	OD (mm)	Weight (kg/m)	Bend. Radius (mm)	max. Work.press. (bar)	max. Vacuum (bar)
203	208,2	1,39	203	0,60	0,10
229	234,2	1,60	229	0,50	0,08
254	259,2	1,78	254	0,40	0,07
305	310,2	2,17	305	0,20	0,05

Further diameters available upon request!

Technical data are based on + 25° C.



info@iq-parts.nl
Harsweg 34A
2461 EZ Ter Aar
T +31 252 624 126
The Netherlands